

# SRX 7800 9900

THE  
**ERGI 100**  
SERIES



**NEW**



## SRX: THE SUPERSPECIALIZED ARTICULATED TRACTOR

*SRX is a superspecialized tractor which can work in cramped spaces, between rows of crops, in orchards, vineyards, nurseries, and on flat or sloping terrain. SRX is a reversible isodiametric (4 same size tires) tractor featuring an articulated chassis and peerless agility and handiness. Its low center of gravity assures unmatched stability. This is due to its finely-tuned engines and constant ground adherence, which is ensured by the projecting*

*engine configuration and the 4-wheel drive, SRX enjoys a stable trim in all conditions. Its extraordinary versatility is achieved by its reversible driving position: the vehicle can change position in order to use an extensive range of plowing, pruning, treatment, harvesting, towing and material handling equipment. The ergonomic controls simplify work and eliminate operator fatigue and stress.*

# SRX 7800 / 9900

THE **ERGI 100** SERIES



**Chassis:** ACTIO™ – Full chassis with oscillation • Reversibility RGS™ • Articulated • 4 equal wheel drive • Front and rear final drive

**Engine mod. 7800:** Stage 3B - 4 Cylinders - 16 Valves  
Common rail - Power 51,7 kW / 70,3 HP - 2500 rpm - 3319 CC

**Engine mod. 9900:** Stage 3B - 4 Cylinders - 16 Valves • Turbo  
- Common rail - Electronic control injection and EGR  
3769 CC - Power 62.5 kW / 85 HP - 2400 rpm

**Transmission:** Synchronized 32 speed gear box: 16 forward and 16 reverse with synchronized inverter

**PTO:** Rear, independent and synchronized at 540/540E rpm with progressive electrohydraulic engagement

**Rear hydraulic lift:** with 3 point hitch  
Operating Pressure 160 bar - Capacity 2400 Kg

**Brakes:** Standard: hydraulic front and rear disk brakes in oil bath  
Independent emergency and parking brake: band type on transmission

## Standard Features

- Reversible control tower • Rear or front/rear differential lock with electrohydraulic control • Hydraulic system with 2 separate hydraulic pumps • Adjustable steering wheel • Adjustable lifting arms with quick release laterally moving couplings • Adjustable, suspension seat with safety belt • Foldable protection roll bar • Adjustable wheel rims • 3 lever ancillary rear hydraulic system • Rear adjustable height tow hitch • Front tow hitch • Multifunction digital console • Battery • Battery isolation switch • Electrical power point • Safe start system on shuttle control, on PTO and on seat

## Optional

- StarLight cab with air conditioning system and window on the roof, suspended on Silent Blocks; activated carbon filter on request • Hydraulic system controlled by "JPM" Proportional Joystick

**Weight** in order of speed (Kg):


With roll bar 2180 - With StarLight cab 2360



## RGS™



**DIMENSIONS:** tyres 320/70 R20

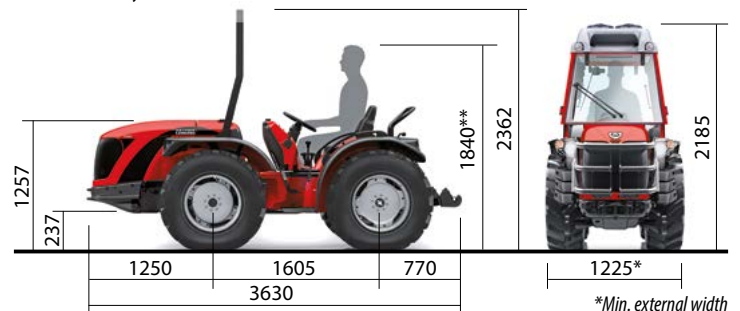

\*Min. external width

\*\*Height calculated with the operator of average height sitting (cm 175)

